

# BIOBOR® ColdFlo® with... LubriBor®


## Diesel Fuel Anti-Gel with Lubricity

**Biobor ColdFlo® with LubriBor®** is a concentrated diesel fuel additive formulated to provide superior cold weather operability and engine protection. **ColdFlo® with LubriBor®** reduces the **pour point** and **cold filter plug point** of diesel fuel while also **preventing ice** and **lubricating injectors and pumps**. The use of this additive will enable diesel fuel to flow through filters at much lower temperatures and prevent fuel icing while also adding vital lubricity to ULSD.

**Applications:** ColdFlo® with LubriBor® is specially-formulated for use in low-sulfur diesel fuels and heating oils, and is commonly used in trucks, farm equipment, locomotives, diesel boats, industrial and construction equipment.

## What does Biobor ColdFlo® with LubriBor® do for you?

- ✓ **Inhibits wax crystal growth**
- ✓ **Reduces Pour Point** of diesel fuel
- ✓ **Reduces Cold Filter Plug Point** by up to 30° F
- ✓ **Jet fuel de-icer** prevents ice blockages and fuel filter icing
- ✓ **Adds lubricity** to protect injectors and fuel pumps
- ✓ **Minimizes the need for kerosene dilution**
- ✓ **ULSD compliant**—contains less than 15 ppm sulfur



Without ColdFlo®



With ColdFlo®

Available sizes...	Treats...
32oz.....	375-750 gal
1 gal.....	1,500-3,000 gal
2.5 gal.....	3,750 -7,500 gal
5 gal.....	7,500-15,000 gal
55 gal.....	82,500-165,000 gal
330 gal.Tote.....	495,000-990,000 gal

Treat Rates	CFPP Reduction*
1:3,000	10-15°F
1:1,500	20-30°F (26° AVG)
1:1,000	30°F
Diesel fuel should be at least 10°F above cloud point when treated.	

Store above 32°F. Additive pour point is - 6.6°F.

\*Additive performance may vary depending on the quality of fuel treated.



Vernon Bartlett

☎ +27 79 524 1461  
 ☎ +27 71 607 7798  
 ✉ vernon@benveroy.com

Werner Pretorius

☎ +27 82 927 4805  
 ✉ ops@benveroy.com

📍 Unit 11 Lakeview Industrial Park  
 Malcolm Moodie Crescent  
 Jet Park  
 BOKSBURG  
 Gauteng Province  
 Republic of South Africa.  
 1518



# ColdFlo®


with...  
**LubriBor®**

Diesel Fuel Anti-Gel with Lubricity

## CFPP Performance of Biobor® ColdFlo® at 1 : 1,500 in Various Fuels

Using Industry Standard Testing ASTM D6371-05 (2010) - Cold Filter Plug Point Test

Average CFPP Reduction = 26.6° F

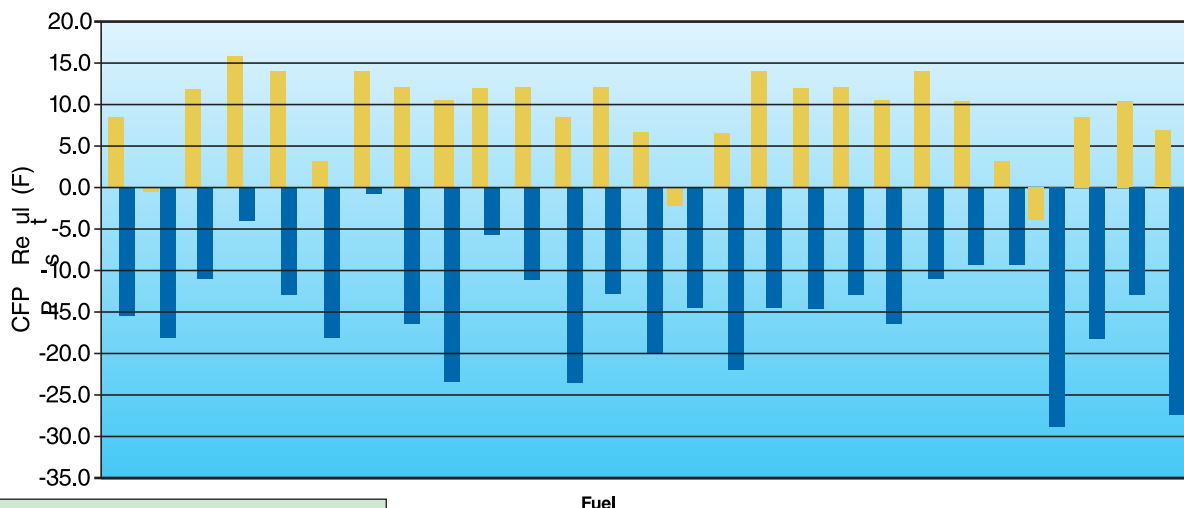

### TREATMENT RATES

1 gal. to every 1,500 gal. of fuel

32 oz.	1 gal.	5 gal.	55 gal.
375 gal.	1,500 gal.	7,500 gal.	82,500 gal.

Use at a ratio of 1 gallon to every 1,000 gallons for extreme conditions.

Available in...  
Quarts, 1 Gal., 2.5 Gal., 5 Gal.  
55 Gal., 330 Gal., Bulk

Fuel

■ Base Fuel ■ ColdFlo (667 ppm)



FUEL ADDITIVES

[www.biobor.com](http://www.biobor.com)

**PLUS adds Lubricity to  
protect injectors and pumps.  
13.8% reduction in wear scar.  
ASTM D6079 HFRR  
Fuel Lubricity Testing**



**BENVEROY**  
• Smart Fuel Solutions •

Vernon Bartlett

+27 79 524 1461  
+27 71 607 7798  
vern@benveroy.com

Werner Pretorius

+27 82 927 4805  
ops@benveroy.com

Unit 11 Lakeview Industrial Park  
Malcolm Moodie Crescent  
Jet Park  
BOKSBURG  
Gauteng Province  
Republic of South Africa.  
1518

Official **BIOBOR** & **Hammonds** Agent for Sub-Saharan Africa & Indian Ocean Islands

[www.biobor.com](http://www.biobor.com)